


What's in the Box?

- Pistol Grip Companion
- Pistol Grip Adaptor
- 6000mAh Pistol Grip Battery (optional)
- 5x Screws

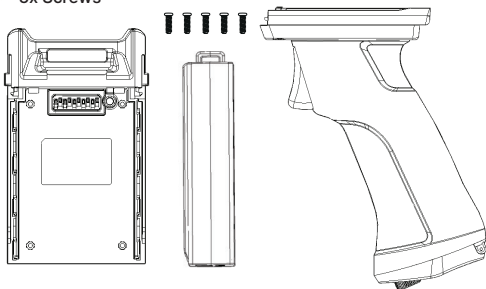


KDC SmartSled sold separately.

Tweezers and a PH0 screwdriver (not included) are required for assembly.

Reading Barcodes

Use the Pistol Grip Companion to easily scan barcodes by pointing at the target and pulling the trigger.

Note: The SmartSled scan buttons remain fully functional and can be used interchangeably.

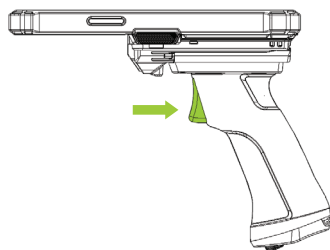

100 Village Blvd Ste 300, Princeton, NJ 08540
+1 609-256-4700 p
info@koamtac.com | www.koamtac.com



Pistol Grip for KDC SmartSled

Mini Guide




For KDC480/485/1000/1100 SmartSled Scanners.


For details on warranty, certifications, and legal compliance, please refer to koamtac.com and the Reference Manual.

Assembly Instructions


1. Using tweezers, carefully remove all four (4) screw caps located on the back of the KDC SmartSled (A).

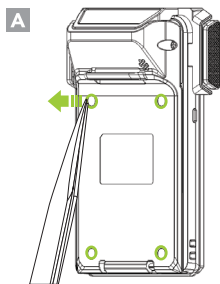


2. Using a PH0 screwdriver, remove all six (6) screws from the back of the KDC SmartSled (B). Keep the top 2 screws in a safe place, as they are needed to return the device to its factory configuration without the Companion.

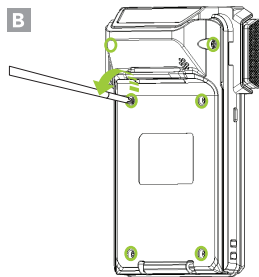

3. Remove the cover plate from the back of the KDC SmartSled (C).

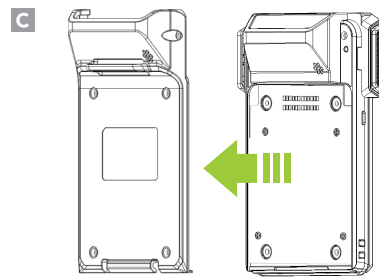

4. Align the screw holes of the Pistol Grip Adaptor with the screw holes on the KDC SmartSled. Attach using the four (4) included screws (D).

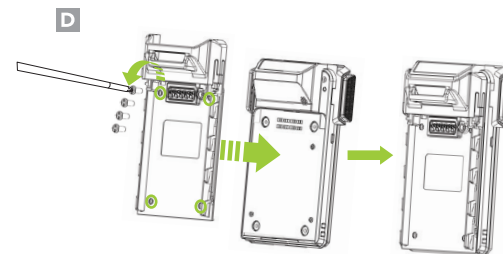


*KDC1100 shown for illustration purposes.
Process is the same for KDC1000, KDC480, and KDC485.


*KDC1000 and KDC1100 require removal of 6 screws. KDC480 and KDC485 do not include the top 2 screws and require removal of the bottom 4 screws only.

Assembly Instructions (Continued)

5. Align the Pistol Grip Companion with the Pistol Grip Adaptor (E), ensuring the side rails and top hook on the Adaptor align with the Pistol Grip.

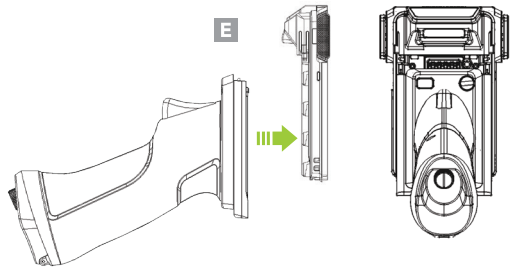


6. Slide the Pistol Grip Companion upward until the hooks engage and it clicks into place (F).

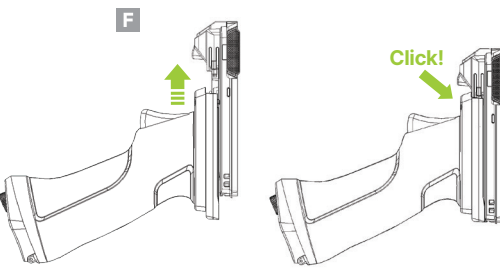


Using the Lock Screw

Using a coin or flat-head screwdriver, tighten the lock screw to secure the unit. Turn clockwise to tighten and counterclockwise to loosen. The screw is captive and cannot be fully removed.

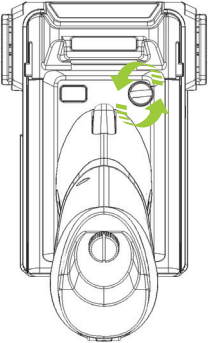

Detaching the Pistol Grip

Loosen the lock screw, then squeeze the tabs on both sides of the Pistol Grip Adaptor. Slide the Pistol Grip downward and away to detach it from the Adaptor and KDC SmartSled.

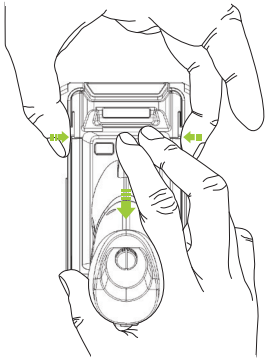


Inserting the Optional 6000mAh Battery


1. Turn the lock screw on the bottom of the Pistol Grip counter-clockwise to open the battery door (G).



2. Align the battery with the slot inside the handle, then insert it into place. The battery fits in only one direction (H).

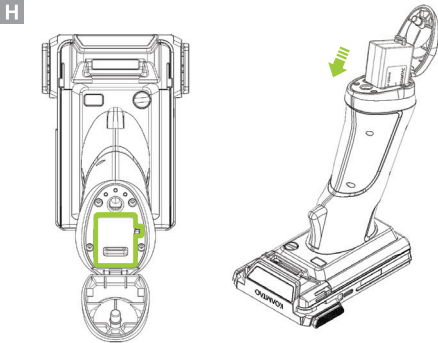


3. Close the battery door, then turn the battery door lock screw clockwise to securely lock (I).

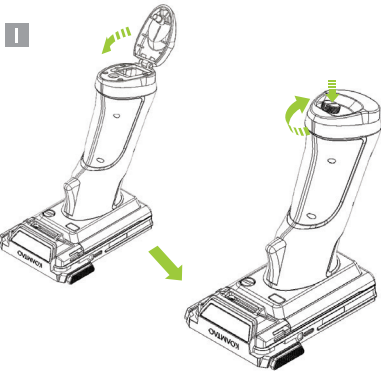

LED Indicators

The Pistol Grip Companion features an LED indicator for device status. Refer to the color definitions below.

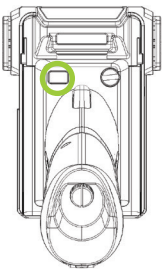

When Charging

- Green: Fully charged
- Orange: Charging
- Red: Low battery

When in Use

- Blinking Green: Fully charged
- Blinking Orange: Discharging
- Blinking Red: Low battery