


What's in the Box?

One (1) of the following devices:

- KDC470 SLED-mPOS Companion
- KDC470 SLED-MSRIC Companion

And:


- 4 screw caps
- 4 screws + 1 extra

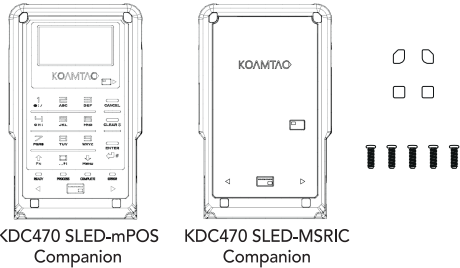


*KDC470 sold separately. Tweezers and PH0 screw driver (not included) will be necessary to complete assembly.

Assembly Instructions

1. Using tweezers, carefully remove all four (4) screw caps from the back of the SmartSled. (A)




2. Remove all four (4) screws from the back of the SmartSled. (B)




3. Remove the cover plate from the back of the SmartSled




4. Using tweezers, carefully remove the top two (2) screw caps from the back of the SmartSled. (D)




5. Align the screw holes of the SLED-mPOS or SLED-MSRIC Companion with the screw holes of the SmartSled

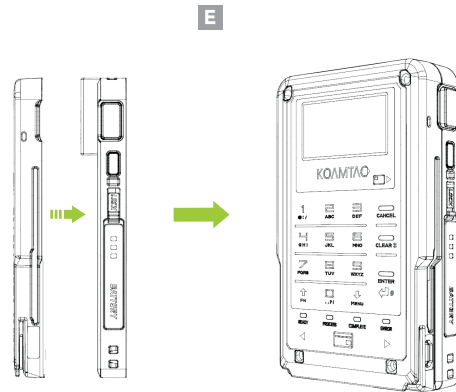

6. Use the four (4) included screws to attach the SLED-mPOS or SLED MSRIC to the SmartSled

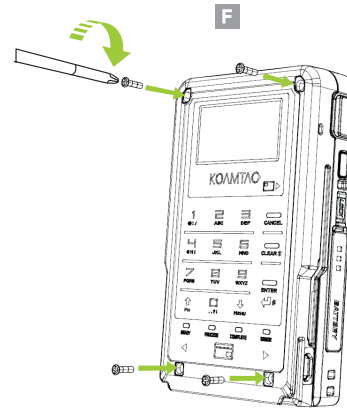

7. Attach the four (4) included screw caps to the SLED-mPOS or SLED-MSRIC Companion. (G)

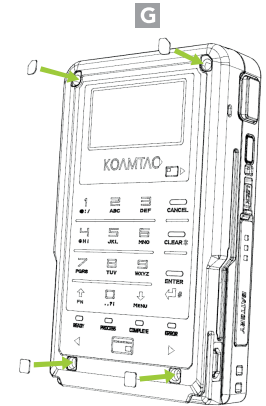

Additional Accessories

- ▶ 0.5W UHF Reader Companion
- ▶ 1.0W UHF Reader Companion
- ▶ 2000mAh Extended Battery Companion
- ▶ Pistol Grip Companion (battery optional)
- ▶ 1-Slot Charging Cradle
- ▶ 4-Slot Charging Cradle

KOAMTAC

116 Village Blvd, Ste 305, Princeton, NJ 08540
+1 609-256-4700 p | +1 609-228-4373 f
info@koamtac.com | www.koamtac.com



SLED-mPOS & SLED-MSR/IC KDC SmartSled Assembly Manual

