


What's in the Box? (Pistol Grip)

- Pistol Grip Companion
- Pistol Grip Adaptor
- Compact PCB
- Companion Cushion
- 6000mAh Pistol Grip Battery (optional)
- 5x Screws

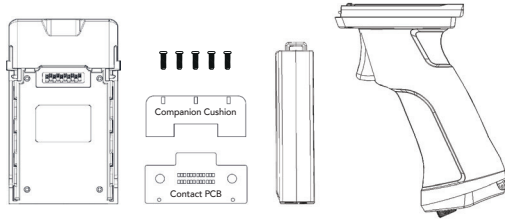


SKX SmartSled sold separately.

Tweezers and a PH0 screwdriver (not included) are required for assembly.

What's in the Box? (Extended Battery)

- Extended Battery Companion
- Extended Battery Adaptor
- Compact PCB
- Companion Cushion
- 5x Screws

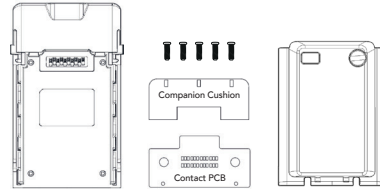


SKX SmartSled sold separately.

Tweezers and a PH0 screwdriver (not included) are required for assembly.

Reading Barcodes with the Pistol Grip

Use the Pistol Grip Companion to easily scan barcodes by pointing at the target and pulling the trigger.

Note: The SmartSled scan buttons remain fully functional and can be used interchangeably.

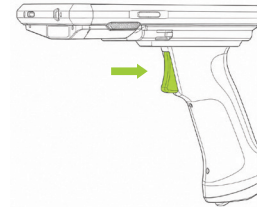

100 Village Blvd Ste 300, Princeton, NJ 08540
+1 609-256-4700 [p](mailto:info@koamtac.com)
info@koamtac.com | www.koamtac.com



Pistol Grip & Extended Battery for SKX SmartSled

Mini Guide




For SKX SmartSled Scanners such as SKX7Pro & SKX6Pro.


For details on warranty, certifications, and legal compliance, please refer to koamtac.com and the Reference Manual.

Installing the Pistol Grip/Extended Battery Adaptor


1. Using tweezers, carefully remove all four (4) screw caps on the back of the SKX SmartSled (A). Then, use a PH0 screwdriver, remove all four (4) screws from the back of the SmartSled (B).

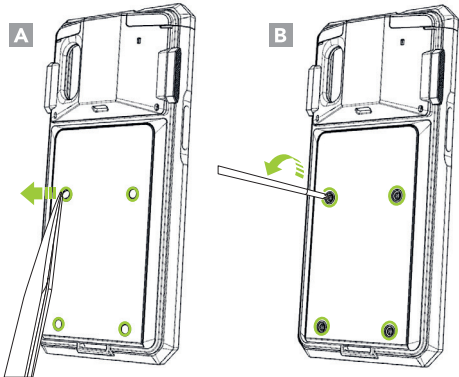


2. Remove the screws and companion cover as shown in (C).

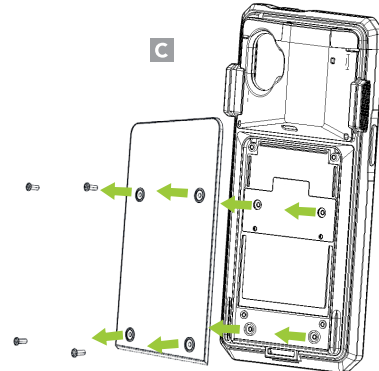

3. Remove the blue protective tape from the companion PCB. Then attach the contact board to the back of the SKX SmartSled as shown in (D).

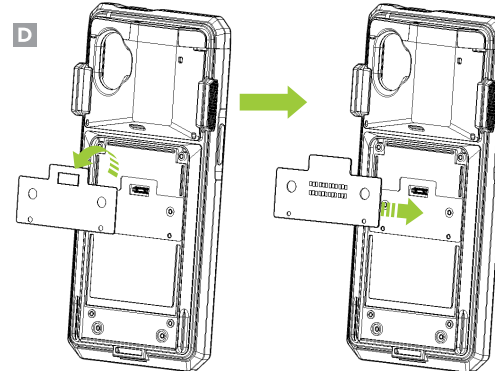


4. Align the screw holes of the adaptor with the screw holes on the SmartSled. Attach using the four (4) included screws (E).

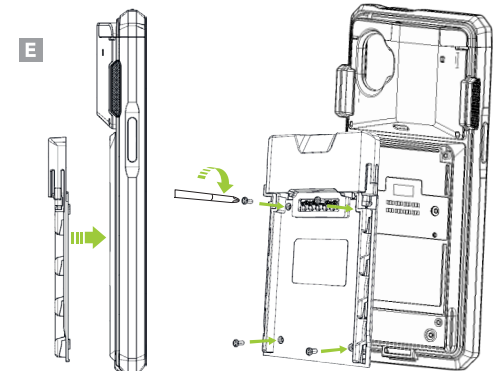


Attaching the Pistol Grip

After installing the adaptor, align the side rails and top hook of the adaptor with the Pistol Grip Companion, then slide it upward until it clicks into place. Then, tighten the lock screw.

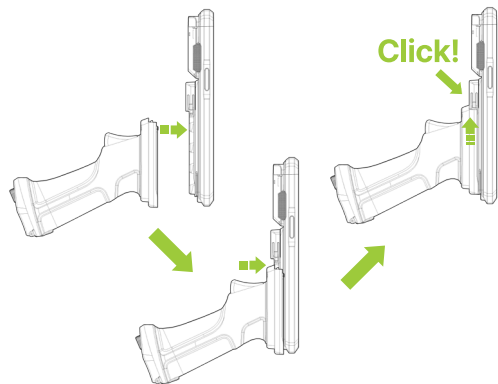


Detaching the Pistol Grip

Loosen the lock screw, then squeeze the tabs on both sides of the adaptor. Slide the Pistol Grip downward and away to detach it from the adaptor and SKX SmartSled.

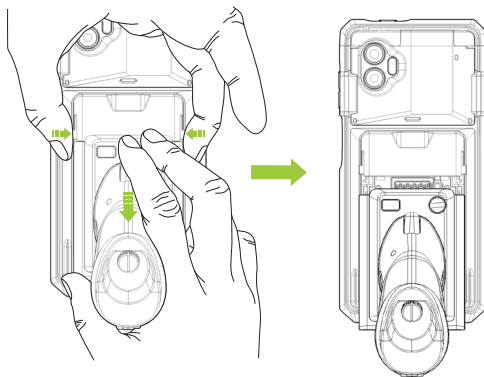


Inserting the Optional 6000mAh Battery

1. Turn the lock screw on the bottom of the Pistol Grip counter-clockwise to open the battery door (E).

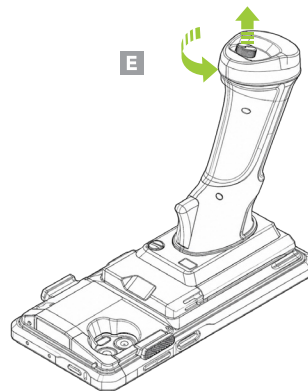


2. Align the battery with the slot inside the handle and insert it. The battery fits in only one direction (F). Close the battery door, then turn the lock screw clockwise to secure it.

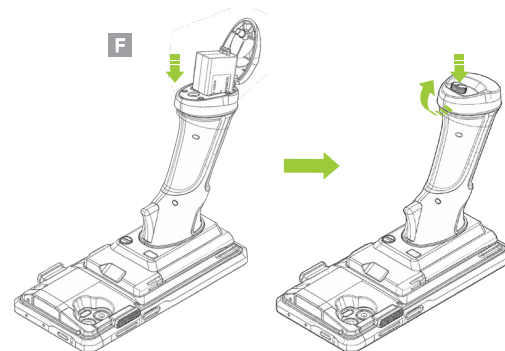


Installing the Extended Battery

After installing the adaptor, align the side rails and top hook of the adaptor with the Extended Battery Companion, then slide it upward until it clicks into place. Then, tighten the lock screw.

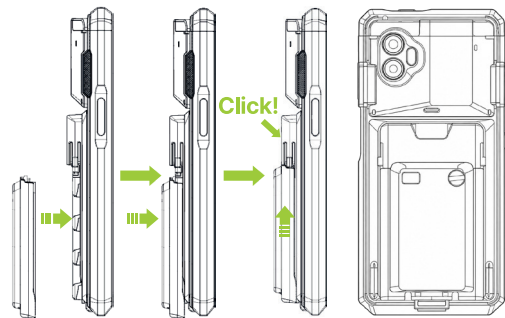

Removing the Extended Battery


Loosen the lock screw, then squeeze the tabs on both sides of the adaptor. Slide the Extended Battery down and away to detach it from the adaptor and SKX SmartSled.

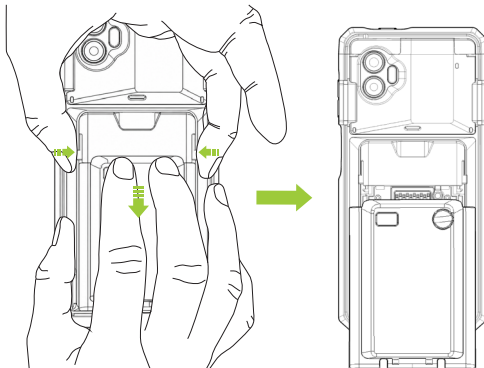

Using the Lock Screw

Using a coin or flat-head screwdriver, tighten the lock screw to secure the unit. Turn **left to tighten** and **right to loosen**.

The screw is captive and can not be fully removed.

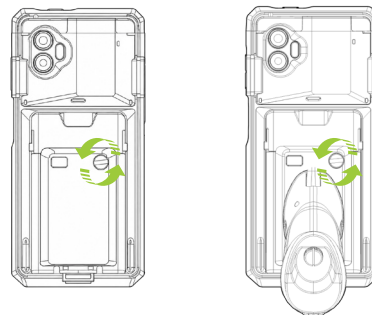

LED Indicators

When Charging

Green: Fully charged

Orange: Charging

Red: Low battery

When in Use

Blinking Green: Fully charged

Blinking Orange: Discharging

Blinking Red: Low battery

